

## NEXIA-W SERIES

- 3 Axis Servo Robot ( Single Arm )
- IMM : 450 ~ 2500 Tons IMM
- Movable Kick Stroke Feature
- Vertical Stroke : 800 ~ 2500 mm ( AC Servo )
- Horizontal Stroke : 2000~ 4500 mm ( AC Servo )
- Kick Stroke : 350 ~ 1500 mm ( AC Servo )
- C Axis : Rotation : 90 Deg ( Standard )
- A Axis : Swivel : 90 Deg ( Option )
- Payload : 5 Kg ~ 40 Kg
- 2 Vacuum x 2 Chuck
- SPI Standard Plug, Conveyor Signal.




HYROBOTICS CORP, 5988 MID RIVERS MALL DR. ST. LOUIS MO 63304  
Website : [www.hyrobots.com](http://www.hyrobots.com), Email : [Sales@hyrobots.com](mailto:Sales@hyrobots.com)

All information is subject to change without any notice.



# OPTIMIZED DESIGN WITH FAST SPEED !

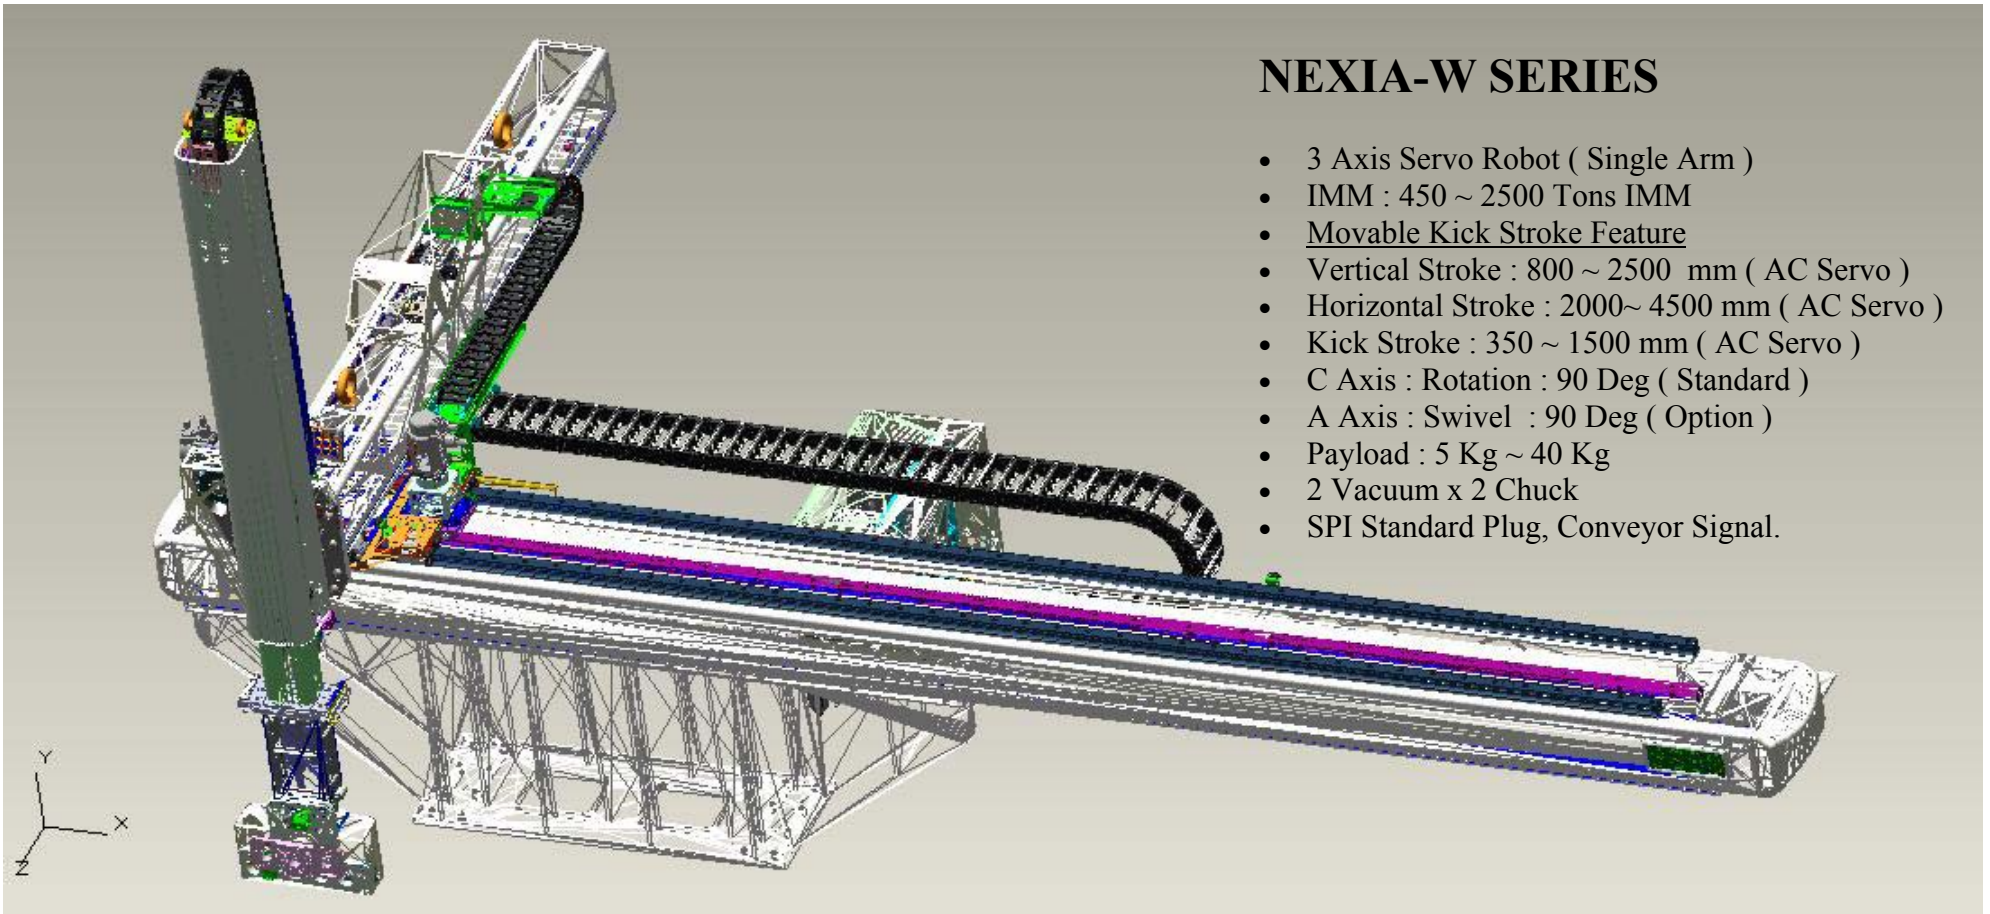

## NEXIA-W SERIES

- 3 Axis Servo Robot ( Single Arm )
- IMM : 450 ~ 2500 Tons IMM
- Movable Kick Stroke Feature
- Vertical Stroke : 800 ~ 2500 mm ( AC Servo )
- Horizontal Stroke : 2000~ 4500 mm ( AC Servo )
- Kick Stroke : 350 ~ 1500 mm ( AC Servo )
- C Axis : Rotation : 90 Deg ( Standard )
- A Axis : Swivel : 90 Deg ( Option )
- Payload : 5 Kg ~ 40 Kg
- 2 Vacuum x 2 Chuck
- SPI Standard Plug, Conveyor Signal.

